

[www.sinotint.com](http://www.sinotint.com)

**Sinotint**

## DUST-FREE SANDING SYSTEM

**Integrity, Innovation, Win-win**

**Sinotint**

Add.: No. 96 Ruida Rd, HI-NEW Tech Zone, Zhengzhou, Henan450000, P.R.China.

Tel.: +86-371-67575169

Fax: +86-371-67575168

E-mail: [fionaliu@sinotint.com](mailto:fionaliu@sinotint.com)

[luciasieh@sinotint.com](mailto:luciasieh@sinotint.com)




FOR CAR BODY REPAIR

FOR WALL SANDING

ZHENGZHOU SANHUI MACHINERY & EQUIPMENT CO.,LTD

# Sinotint

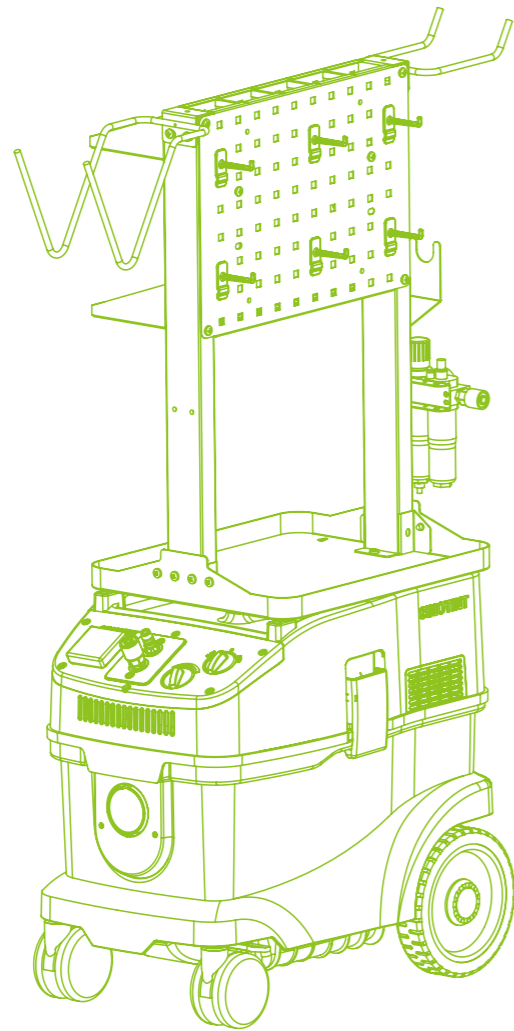

## Company Profile

Zhengzhou Sanhui Machinery & Equipment Co., Ltd. (SINOTINT for short) is specialized in the R&D, production, sales and service of paint mixing equipment and dust free dry sanding system.

Adhering to the "integrity, innovation, win-win" business philosophy, SINOTINT gains continuous growth. Today, we provide quality products and efficient services to over 60 countries and regions worldwide, and have become the world's fastest growing and the most competitive manufacturer in the industry.

With perfect combination of the product and user experience, in the near future, SINOTINT will grow into the popularizer of paint mixing equipments and sanding system application.

# Content

Workcenter Series  
SNT102

01



Trolley Series  
SNT202

03



Electric Sanding Set  
SNT-ES

05



Random Orbital  
Sander

07



Wall Sanding Set  
SNT-AC

08



# Workcenter Series Sanding Set

**SNT102**



## Features:

- ⦿ Streamlined shape, with national appearance patent.
- ⦿ Imported professional vacuum motor, stable and durable.
- ⦿ Intelligent automatic control unit, working status can be showed on the screen, steady performance.
- ⦿ Suitable for class L dust.
- ⦿ Strong extraction power, less dust pollution.



## Main Included

| Item No. | Picture | Product                                   | Description  | SNT100 | SNT101 | SNT102 |
|----------|---------|---|--|--------|--------|--------|
| 1        |         | Mobile dust extractor                     | with 5 seconds delay of closing after the sander closed        | ✓      | ✓      | ✓      |
| 2        |         | Workcenter                                | With 2 racks for sander placing, and 6 hooks for sanding paper | ✓      | ✓      | ✓      |
| 3        |         | Service unit                              | Consists of condensate drain, pressure regulator, oiler        | ✓      | ✓      | ✓      |
| 4        |         | Suction hose                              | Total length: 5m   | ✓      | ✓      | ✓      |
| 5        |         | Pneumatic orbital sander (central vacuum) | 5" or 6"   |        | ✓      | ✓      |
| 6        |         | Pneumatic orbital sander (central vacuum) | Size-90x180 mm   |        |        | ✓      |

## Technical data:

|                                     |                                |
|-------------------------------------|--------------------------------|
| Voltage/Frequency                   | 220V/50Hz                      |
| Power consumption                   | 350-1200W                      |
| Noise                               | ≤70dB                          |
| Vacuum                              | ≥28000Pa                       |
| Operation Pressure                  | ≥0.7MPa                        |
| Rubber-insulated mains cable        | 2m                             |
| Appliance socket connected load     | ≤600W                          |
| Container capacity                  | 36L                            |
| Max. volume flow                    | 3900L/min                      |
| Weight                              | 33kg                           |
| Filter surface area                 | 6800cm <sup>2</sup>            |
| Shape Size (mm)                     | 910 × 380 × 1210mm (L × W × H) |
| Packing Size (mm)                   | 710 × 640 × 620mm (L × W × H)  |
| ★ Electric Orbit Sander is optional |                                |

Note: If there is inconsistency between the image and actual product, the actual product shall govern.

# Trolley Series Dust-free Sanding Set

**SNT202**



## Features:

- ⦿ Streamlined shape, with national appearance patent.
- ⦿ Imported professional vacuum motor, stable and durable.
- ⦿ Intelligent automatic control unit, working status can be showed on the screen, steady performance.
- ⦿ Suitable for class L dust.
- ⦿ Strong extraction power, less dust pollution.



## Main Included

| Item No. | Picture | Product                                   | Description   | SNT200 | SNT201 | SNT202 |
|----------|---------|---|---|--------|--------|--------|
| 1        |         | Mobile dust extractor                     | with 5 seconds delay of closing after the sander closed   | ✓      | ✓      | ✓      |
| 2        |         | Trolley                                   | Colors optional: white or black. With 2 racks for sander placing, and 6 hooks for sanding paper | ✓      | ✓      | ✓      |
| 3        |         | Service unit                              | Consists of condensate drain, pressure regulator, oiler   | ✓      | ✓      | ✓      |
| 4        |         | Suction hose                              | Total length: 5m  | ✓      | ✓      | ✓      |
| 5        |         | Pneumatic orbital sander (central vacuum) | 5" or 6"  |        | ✓      | ✓      |
| 6        |         | Pneumatic orbital sander (central vacuum) | Size-90x180 mm  |        |        | ✓      |

## Technical data:

|                                 |                                |
|---------------------------------|--------------------------------|
| Voltage/Frequency               | 220V/50Hz                      |
| Power consumption               | 350-1200W                      |
| Noise                           | ≤70dB                          |
| Vacuum                          | ≥28000Pa                       |
| Operation Pressure              | ≥0.7MPa                        |
| Rubber-insulated mains cable    | 2m                             |
| Appliance socket connected load | ≤600W                          |
| Container capacity              | 36L                            |
| Max. volume flow                | 3900L/min                      |
| Weight                          | 54kg                           |
| Filter surface area             | 6800cm <sup>2</sup>            |
| Shape Size (mm)                 | 610 × 710 × 1310mm (L × W × H) |
| Packing Size (mm)               | 730 × 620 × 1050mm (L × W × H) |

★ Electric Orbit Sander is optional

Note: If there is inconsistency between the image and actual product, the actual product shall govern.

# Electric Sanding Set

**SNT-ES**



## Features:

- ◎ Mobile workcenter design, smart and flexible. Abrasives, sanders and other tools are clearly arranged on the work center. Equipped with a 6" electric orbital sander.
- ◎ Streamlined shape, with national appearance patent.
- ◎ Imported professional vacuum motor, stable and durable.
- ◎ Intelligent automatic control unit, steady performance, safe and reliable.
- ◎ Suitable for both wet and dry extraction, for class L dust.



## Main Included

| Item No. | Picture | Product                                  | Description  |
|----------|---------|--|--|
| 1        |         | Mobile dust extractor                    | with 5 seconds delay of closing after the sander closed        |
| 2        |         | Workcenter                               | With 2 racks for sander placing, and 6 hooks for sanding paper |
| 3        |         | Suction hose                             | Total length: 5m   |
| 4        |         | Electric orbital sander (central vacuum) | 6"   |

## Technical data:

|                                 |                                |
|---------------------------------|--------------------------------|
| Voltage/Frequency               | 220V/50Hz                      |
| Power consumption               | 350-1200W                      |
| Noise                           | ≤70dB                          |
| Vacuum                          | ≥28000Pa                       |
| Operation Pressure              | ≥0.7MPa                        |
| Rubber-insulated mains cable    | 2m                             |
| Appliance socket connected load | ≤600W                          |
| Container capacity              | 36L                            |
| Max. volume flow                | 3900L/min                      |
| Weight                          | 33kg                           |
| Filter surface area             | 6800cm <sup>2</sup>            |
| Shape Size (mm)                 | 910 × 380 × 1210mm (L × W × H) |
| Packing Size (mm)               | 710 × 640 × 620mm (L × W × H)  |

Note: If there is inconsistency between the image and actual product, the actual product shall govern.

# Random Orbital Sander

## Pneumatic Orbital Sander



Features:

- Ergonomic design with advanced support structure brings comfortable feel.
- Imported spare parts and materials, high-performance motor and transmission group.
- Low vibration and noise.

Technical data:

|                 |                        |                        |                        |
|-----------------|------------------------|------------------------|------------------------|
| Shape Size(mm)  | 123mm(5")              | 148mm(6")              | 90x180mm               |
| Weight          | 750g                   | 850g                   | 1110g                  |
| Air consumption | 0.3m <sup>3</sup> /min | 0.3m <sup>3</sup> /min | 0.3m <sup>3</sup> /min |
| Air pressure    | 6.3 kg/cm <sup>2</sup> | 6.3 kg/cm <sup>2</sup> | 6.3 kg/cm <sup>2</sup> |
| Sound Level     | 80dBa                  | 80dBa                  | 80dBa                  |
| Power           | 290W                   | 290W                   | 290W                   |
| RPM.            | 11000                  | 11000                  | 9000                   |
| Orbit           | 2.5mm,5mm              | 2.5mm,5mm              | 2.5mm                  |
| Type            | Central Vacuum         | Central Vacuum         | Central Vacuum         |


## Electric Orbital Sander

Technical data:

|            |                        |
|------------|------------------------|
| Shape Size | 152 mm                 |
| Power      | 350W                   |
| RPM.       | 4000-10000(adjustable) |
| Orbit      | 5mm                    |
| Type       | Central Vacuum         |



## Pad Protector

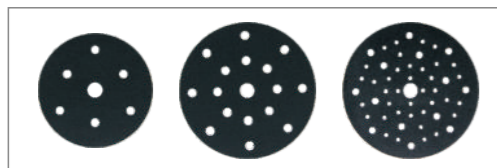

## Interface Pad



# Wall Sanding Set

**SNT-AC**



Features:

- Intelligent control system, easy operation.
- Self-cleaning system realizes maximizing suction power in real time.
- Imported professional vacuum motor, stable and durable.
- High-grade filter brings high-level dust filtering effect.
- Brushless sander, easy to use, stable performance.
- With independent patents.

